



# TASKI® swingo® 150 E

**1** Preparation



Remove tank from machine by pulling the lever. Remove dosing cup by turning it to the left.

**2**



Fill solution tank with fresh water up to indicated mark. Label with mark is on solution tank side.

**3**




Dose cleaning product into dosing cup and pour into solution tank. Make sure dosing cup is exactly turned in.

**4**




Remount tank in machine until it locks into place and press the hook to lock tank.

**5** Operation




Plug cable and press main switch to turn machine on. Switch will light up.

**6**




Hold machine firmly by the handle. Bring it to working position by pressing red foot pedal.

**7**




Adjust brush pressure by turning knob slowly anti-clockwise until red light turns off. Red light indicates that motor is overloaded.

**8**




Press first suction switch (no lamp) and afterwards water pump switch (lamp lights up).

**9**



If red light goes on and off immediately while working, adjustment is correct. Cleaning can start following direction of arrows (picture).

**10** Maintenance



Switch off water pump. Run suction unit for 10 seconds more to suck out remaining water. Switch off suction motor.

**11**



Switch machine off. Lock machine in vertical park position. Unplug cable. Always disconnect cable before any maintenance!

**12**



Remove tank from machine by pulling the hook. Unlock and remove filter housing.

**13**



Empty both tanks. Rinse and wash tank insides with room temperature water and a non abrasive sponge.

**14**



Unhook transparent filter cover and remove filter. Wash filter under running water. Wring it out so that water can flow away.

**15**



Wash out whole filter housing and float under running room temperature water.

**16**



Do not remount filter before it is completely dry!

**17**




Hook filter housing in tank paying attention that front tooth is correctly inserted.

**18**




Remove brush housing cover by unsliding two side latches. Rotate yellow clips until they unhook to release squeegees.

**19**




Put machine on left side to remove squeegees. Wash squeegees under running room temperature water.

**20**

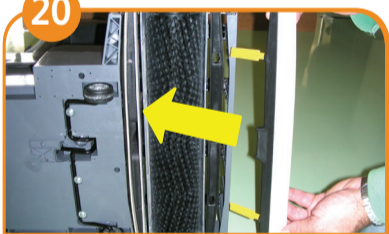

Check squeegee condition before installing. Replace squeegees and note front & rear writing on squeegee top.

**21**



Press rotation lock, turn brush holder anticlockwise and pull it out. Push and remove brush roller to clean.

**22**




Clean brush housing using damp cloth.

**23**




Check bristle length before reinstall brush roller. Refit brush holder and turn it clockwise until lock latches into place.

**24**



Rotate yellow clip. Remove transparent converter cover. Check suction conveyor that it is free from debris. Remount cover and hook it.

**25**



Clean machine with moist cloth. Store machine with open tank for ventilation.

